

# Газовые плиты Master серий M42, M43, M44

## Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: [gub@nt-rt.ru](mailto:gub@nt-rt.ru) || сайт: <https://garland.nt-rt.ru/>

# Master Series Heavy Duty Combination Top Range

## Models

- M42-6R
- M42-6S
- M42-6T



Even Heat Hot Top & Two Open Burners Range

## Standard Features

- Stainless steel front and sides
- 6" (152mm) chrome steel adj. legs
- 7-1/2" (191mm) stainless steel front rail
- 1 heavy duty cast iron even heat top on left with 1 burner rated 30,000 BTU (8.89kW) total
- Heavy gauge aluminized steel radiation baffle shield
- Two 35,000 BTU (10.25kW), natural or 32,000 BTU (9.37kW) 2- piece Starfire burners with removable heads
- Removable ring grates over each open top burner
- Cast iron top grates
- Stainless steel drip tray under open burners
- Piezo Spark ignition for oven
- 40,000 BTU (11.72kW) natural gas, 35,000 BTU (10.25kW) propane gas cast iron oven burner
- Fully porcelainized oven interior

## Options & Accessories


- Stainless steel oven interior
- Stainless steel main back
- Corner columns for banking -specify
- Stainless steel common front rail up to 102" (2591 mm) wide, (two or more units in a battery)
- Convection oven base, add C to model #, e.g. M42-6RC
- Additional oven rack
- Rear gas connection, 3/4" or 1-1/4" NPT
- Gas regulator 3/4" or 1-1/4"
- Gas shut off valve; 3/4", 1" or 1-1/4" NPT
- Gas flex hose & quick disconnect (3/4", 1" or 1-1/4" NPT x 5') w/ restraining device, please specify
- End caps and cover (NC, specify)
- Set of (4) Polyurethane non-marking swivel casters w/front brakes
- 6" (152mm) stainless steel adj. legs
- Dais base (not for use with "RC" oven)
- Storage base shelf of aluminized or stainless steel
- Stainless steel tubular high shelf, single or double deck
- Stainless steel backguard: 10" (354mm), 17" (432mm) or 33" (838mm)
- 230 volt, 50 cycle components, RC motor (export)
- Celsius dial for oven thermostat (NC)

## Specifications

Heavy-duty gas range with oven, Model M42-6R, combination top. One 17" (432mm) wide even hot top, 30,000 BTU (8.79kW) on left and two 35,000 BTU (10.25kW) Starfire open burners. Heavy duty cast iron top grates/ring grates 34" (864mm) wide x 38" (965mm) deep, including 7-1/2" (191mm) deep stainless steel front rail. Porcelain enamel oven interior with 40,000 BTU (11.72kW) cast iron oven burner. Stainless steel front and sides. Natural or propane gas. Also available with storage base w/ doors, suffix S, and modular top, suffix T.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



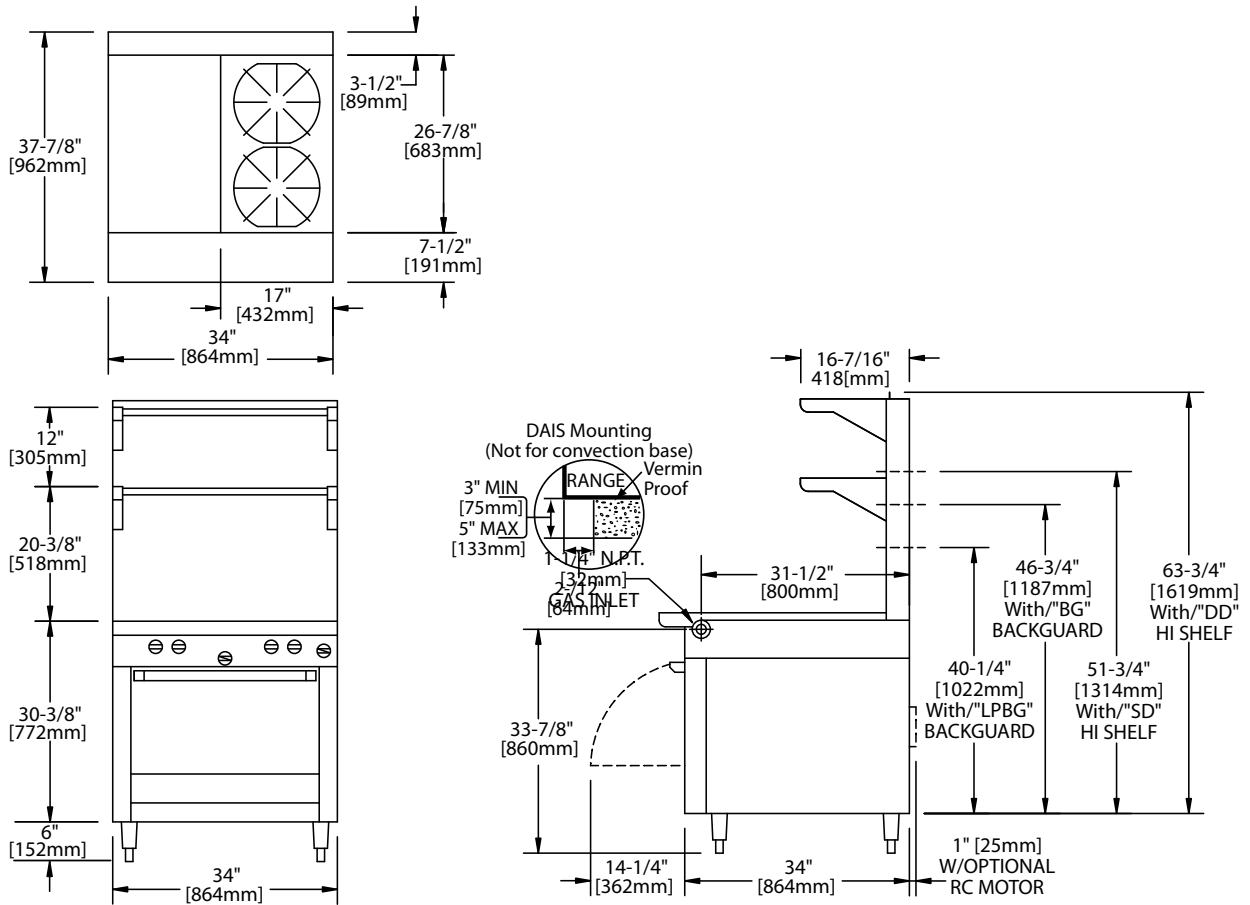

| Product | Width:<br>In(mm) | Depth:<br>In(mm) | Height: In(mm)<br>(w/ NSF Legs) | Height: In(mm)<br>(w/o NSF Legs) | Oven/Storage Base Interior: in(mm) |           |             |
|---------|------------------|------------------|---------------------------------|----------------------------------|------------------------------------|-----------|-------------|
|         |                  |                  |                                 |                                  | Width                              | Depth     | Height      |
| M42-6R  | 34(864)          | 38(965)          | 36-3/8(924)                     | 30-3/8(772)                      | 26-1/4(667)                        | 29(737)** | 13-1/2(343) |
| M42-6S  | 34(864)          | 38(965)          | 36-3/8(924)                     | 30-3/8(772)                      | 26-1/4(667)                        | 29(737)   | 13-1/2(343) |
| M42-6T  | 34(864)          | 38(965)          | 36-3/8(924) w/stand             | 9-1/2(241) w/o stand*            | N/A                                | N/A       | N/A         |

\*Modular top has 1-1/2" seating flanges. \*\*RC oven is 25" (635mm) deep.

| INPUT-BTU/hr | M54R & M54 RC     |                   | M54S & M54T       |                  |
|--------------|-------------------|-------------------|-------------------|------------------|
|              | Natural           | Propane           | Natural           | Propane          |
| Hot Top      | 30,000 (8.90kW)   | 30,000 (8.90kW)   | 30,000 (8.90kW)   | 30,000 (8.90kW)  |
| Open Burners | 70,000 (20.50kW)  | 64,000 (18.74kW)  | 70,000 (20.50kW)  | 64,000 (18.74kW) |
| Oven***      | 40,000 (11.72kW)  | 35,000 (10.25kW)  | N/A               | N/A              |
| Total        | 140,000 (41.12kW) | 129,000 (37.89kW) | 100,000 (29.40kW) | 94,000 (27.64kW) |

RC=Range w/Convection Oven R=Range w/Oven S=Range w/Storage Base T=Modular Top

| INSTALLATION NOTES                       |                           |                          | Shipping Wt: (Lb/Kg) <sup>2</sup> |
|------------------------------------------|---------------------------|--------------------------|-----------------------------------|
| Combustible Wall Clearances <sup>1</sup> | Entry Clearances          | Operating Pressure       | M42-6R 445/202                    |
| Sides: 11" (279mm)                       | Crated: 39-1/4"(997mm)    | Natural: 6" WC (15mbar)  | M42-6S 345/157                    |
| Back: 6" (152mm)                         | Uncrated: 34-1/4" (870mm) | Propane: 10" WC (25mbar) | M42-6T 255/116                    |

<sup>1</sup>NOTE: Installation clearance reductions are applicable only where local codes permit.

<sup>2</sup>Shipping Cubic Feet 50 for R & S Models, 20 for T models

Data applies only to North America

Gas input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Electrical characteristics each RC oven: 1/3 HP motor, 120 VAC, single phase, 3.4 amps, 6 ft. (1.8m) power cord with NEMA 5-15P plug provided.

230 VAC export is direct connect, single phase, 50 Hz. Please specify gas type when ordering.

# Master Series Heavy Duty Open Burner Top Range

## Models

- M43R
- M43S
- M43T



Model M43R  
Range With  
Six Open Star Burners

## Standard Features

- Stainless steel front and sides
- 6" (152mm) chrome steel adj. legs
- 7-1/2" (191mm) stainless steel front rail
- Six (6) 24,000 BTU, (7 kW) natural, 20,000 BTU (5.86kW) propane Starfire burners
- Removable ring grate bowl over each burner
- Cast iron top grates
- One-piece Stainless Steel drip tray
- Piezo spark ignition for oven
- Fully porcelainized oven interior
- 40,000 BTU, (11.72 kW) natural gas, 35,000 BTU (10.75kW) propane gas cast iron oven burner
- Storage base interior of aluminized steel

## Options & Accessories


- Stainless steel common front rail up to 102" (2591mm) wide (two or more units in a battery)
- Stainless steel main back
- Stainless steel oven interior
- Convection oven base, add C to Model No., e.g. M43RC
- Additional oven rack
- Rear gas connection; 3/4", 1", or 1-1/4" NPT
- Gas regulator 3/4" or 1-1/4"
- Gas shut off valve; 3/4", 1" or 1-1/4" NPT
- Gas flex hose & quick disconnect (3/4", 1" or 1-1/4" NPT x 5') w/ restraining device, please specify
- End caps and cover, NC, specify
- Set of (4) Polyurethane non-marking swivel casters w/front brakes
- 6" (152mm) stainless steel adj. legs
- Storage base shelf of aluminized or stainless steel
- Stainless steel tubular high shelf, single or double deck
- Stainless steel backguard: 10" (354mm), 17" (432mm) or 33" (838mm)
- 230 volt, 50 cycle components, RC motor (export)
- Celsius dial for oven thermostat, NC

## Specifications

Heavy-duty gas range with oven, with six (6) 24,000 BTU, (7 kW), Starfire burners. Heavy-duty cast iron top grates/ring grates. 34" (864mm) wide x 38" (965mm) deep, including 7-1/2" (191mm) deep stainless steel front rail. Porcelain enamel oven interior with 40,000 BTU, (11.72 kW), cast iron burner. Stainless steel front and sides. Natural or propane gas. Also available with storage base with doors, suffix S, and modular top, suffix T.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



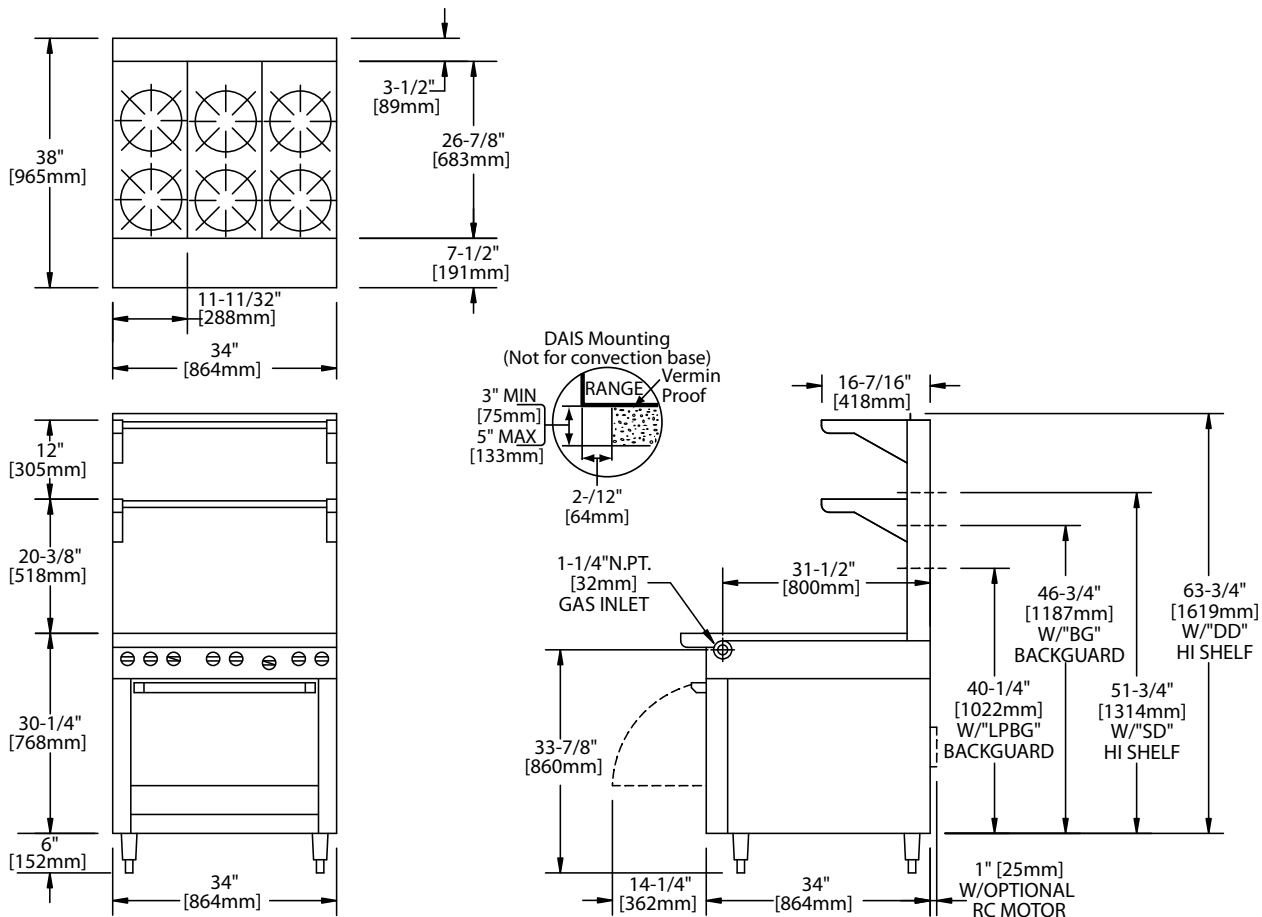

| Product | Width:<br>In(mm) | Depth:<br>In(mm) | Height: In(mm)<br>(w/ NSF Legs) | Height: In(mm)<br>(w/o NSF Legs) | Oven/Storage Base Interior: in(mm) |             |             |
|---------|------------------|------------------|---------------------------------|----------------------------------|------------------------------------|-------------|-------------|
|         |                  |                  |                                 |                                  | Width                              | Depth       | Height      |
| M43R    | 34(864)          | 38(965)          | 36-1/4(921)                     | 30-1/4(768)                      | 26-1/4(667)                        | 29(737)**   | 13-1/2(343) |
| M43S    | 34(864)          | 38(965)          | 36-1/4(921)                     | 30-1/4(768)                      | 26(665)                            | 30-1/2(773) | 20-1/2(519) |
| M43T    | 34(864)          | 38(965)          | 36-3/8(924) w/stand             | 9-1/2(241) w/o stand*            | N/A                                | N/A         | N/A         |

\*Modular Top has 1 1/2" seating flanges \*\*RC oven is 25"(635mm) deep

| INPUT-BTU/hr (Natural Gas) | M43R & M43RC      | M43S & M43T       |
|----------------------------|-------------------|-------------------|
| Top Section***             | 144,000 (42.19kW) | 144,000 (42.19kW) |
| Oven ***                   | 40,000 (11.72kW)  | N/A               |
| Total                      | 184,000 (53.91kW) | 144,000 (42.19kW) |

RC=Range w/Convection Oven R=Range w/Oven S=Range w/Storage Base T=Modular Top

\*\*\* Top Sections rated 120,000 BTU (35.16kW) and Oven Rated 35,000 BTU (10.25kW) for Propane gas

| INSTALLATION NOTES           |                           |                         | Shipping Wt: (Lb/Kg)² |
|------------------------------|---------------------------|-------------------------|-----------------------|
| Combustible Wall Clearances¹ | Entry Clearances          | Operating Pressure      | M43R 440/200          |
| Sides: 11" (279mm)           | Crated: 39-1/4"(997mm)    | Natural: 6 WC (15mbar)  | M43S 340/155          |
| Back: 6" (152mm)             | Uncrated: 34-1/4" (870mm) | Propane: 10 WC (25mbar) | M43T 250/114          |

¹NOTE: Installation clearance reductions are applicable only where local codes permit.

²Shipping Cubic Feet 50 for R & S Models, 20 for T models

Data applies only to North America

Gas input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Electrical characteristics each RC oven: 1/3 HP motor, 120 VAC, single phase, 3.4 amps, 6 ft. (1.8m) power cord with NEMA 5-15P plug provided.

230 VAC export is direct connect, single phase, 50 Hz. Please specify gas type when ordering.

# Master Series Heavy Duty French Top Range

## Models

- M43-FTR
- M43-FTS
- M43-FTT



Model M43FTR  
French Top Range With 3  
Open Burners & 3 Hot Tops

## Standard Features

- Stainless steel front and sides
- 6" (152mm) chrome steel adj. legs
- 7-1/2" (191mm) stainless steel front rail
- Three 18,000 BTU (5.3kW) natural or 16,000 BTU (4.69kW) propane gas Starfire open burners
- Removable ring grates over open burners at front
- Cast iron top grates
- One piece stainless steel drip tray
- Three solid removable cast iron hot top plates at rear, each with 15,000 BTU (4.4kW) natural or 16,000 BTU (4.69 kW) propane gas Starfire burner
- Piezo Spark ignition for oven
- Fully porcelainized oven interior
- 40,000 BTU (11.72kW), natural gas; 35,000 (19.25kW), propane, cast iron oven burner
- Storage base of aluminized steel

## Options & Accessories


- Convection oven base, add C to model #, e.g. M43-FTRC
- Additional oven rack
- Stainless steel oven interior
- Stainless steel main back
- Stainless steel common front rail up to 102" (2591mm) wide (two or more units in a battery)
- Rear gas connection, 3/4", 1" or 1-1/4" NPT
- Gas regulator 3/4" or 1-1/4"
- Gas shut off valve; 3/4", 1" or 1-1/4" NPT
- Gas flex hose & quick disconnect (3/4", 1" or 1-1/4" NPT x 5') w/ restraining device, please specify
- End caps and cover, NC specify
- Set of (4) Polyurethane non-marking swivel casters w/front brakes
- 6" (152mm) stainless steel adj. legs
- Dais base (not for use with RC oven)
- Storage base shelf of aluminized or stainless steel
- Stainless steel tubular high shelf, single or double deck
- Stainless steel backguard: 10" (354mm), 17" (432mm) or 33" (838mm)
- 230 volt, 50 cycle components, RC motor (export)
- Celsius dial for oven thermostat (NC)

## Specifications

Heavy duty gas range with oven, Model M43-FTR French Top, consisting of 3 open Starfire burners in front, 18,000 BTU (5.3kW) each and 3 hot tops, with 15,000 BTU (4.4kW) Starfire burner each at rear. Open burners have heavy duty cast iron top grates/ring grates and hot tops are heavy duty cast iron 11-1/4" (286mm) wide x 14-3/4" (375mm) deep. All top burners controlled with On/Off valve. 34" (864mm) wide x 38" (965mm) deep, including 7-1/2" (191mm) deep stainless steel front rail. Porcelain enamel oven interior with 40,000 BTU (11.72kW) cast iron oven burner. Stainless steel front and sides. Natural or propane gas. Also available with storage base w/ doors, model M43-FTS, and modular top, model M43-FTT.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



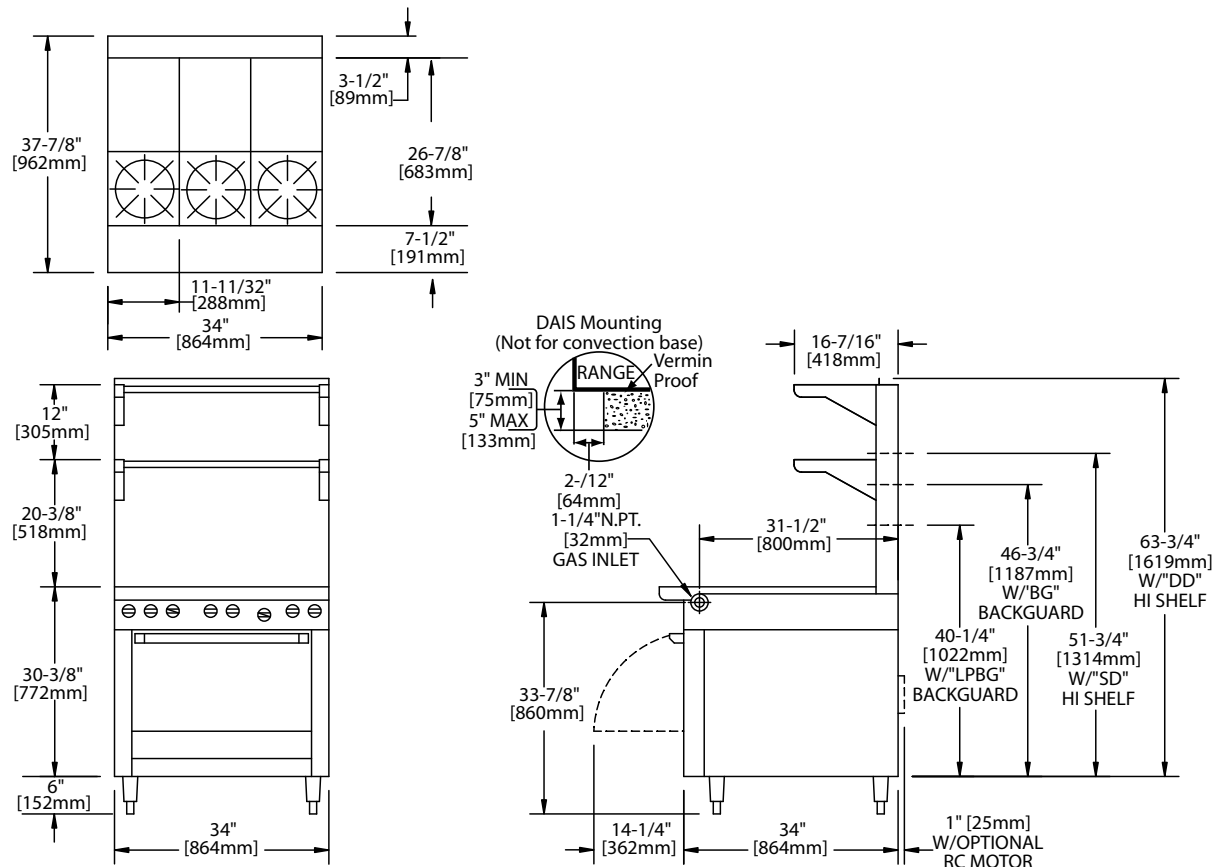

| Product | Width:<br>In(mm) | Depth:<br>In(mm) | Height: In(mm)<br>(w/ NSF Legs) | Height: In(mm)<br>(w/o NSF Legs) | Oven/Storage Base Interior: in(mm) |             |             |
|---------|------------------|------------------|---------------------------------|----------------------------------|------------------------------------|-------------|-------------|
|         |                  |                  |                                 |                                  | Width                              | Depth       | Height      |
| M43-FTR | 34(864)          | 38(965)          | 36-3/8(924)                     | 30-3/8(772)                      | 26-1/4(667)                        | 29(737)**   | 13-1/2(343) |
| M43-FTS | 34(864)          | 38(965)          | 36-3/8(924)                     | 36-3/8(924)                      | 26(665)                            | 30-1/2(773) | 20-1/2(519) |
| M43-FTT | 34(864)          | 38(965)          | 36-3/8(924) w/stand             | 9-1/2 (241) w/o stand*           | N/A                                | N/A         | N/A         |

\*Modular top has 1-1/2" seating flanges. \*\*RC oven is 25" (635mm) deep.

| INPUT-BTU/hr (Natural Gas)                   | M43FTR & M43FTRC | M43FTS & M43FTT |
|----------------------------------------------|------------------|-----------------|
| 6 Top Burners                                |                  |                 |
| 3@18,000(Open Top)*** 3 @ 15,000(Hot Top)*** | 99,000(29.00kW)  | 99,000(29.00kW) |
| BTU Oven***                                  | 40,000(11.72kW)  | N/A             |
| TOTAL                                        | 139,000(40.72kW) | 99,000(29.00kW) |

RC=Range w/Convection Oven R=Range w/Oven S=Range w/Storage Base T=Modular Top

\*\*\* Open and Hot Top Burner rated 16,000 BTU (4.69kW) and Oven Rated 35,000 BTU (10.25kW) for Propane gas

| INSTALLATION NOTES                       |                           |                          | Shipping Wt: (Lb/Kg) <sup>2</sup> |
|------------------------------------------|---------------------------|--------------------------|-----------------------------------|
| Combustible Wall Clearances <sup>1</sup> | Entry Clearances          | Operating Pressure       | M43-FTR 440/200                   |
| Sides: 11" (279mm)                       | Crated: 39-1/4" (997mm)   | Natural: 6" WC (15mbar)  | M43-FTS 340/155                   |
| Back: 6" (152mm)                         | Uncrated: 34-1/4" (870mm) | Propane: 10" WC (25mbar) | M43-FTT 250/114                   |

<sup>1</sup>NOTE: Installation clearance reductions are applicable only where local codes permit.

<sup>2</sup>Shipping Cubic Feet 50 for R & S Models, 20 for T models

Data applies only to North America

Gas input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Electrical characteristics each RC oven: 1/3 HP motor, 120 VAC, single phase, 3.4 amps, 6 ft. (1.8m) power cord with NEMA 5-15P plug provided.

230 VAC export is direct connect, single phase, 50 Hz. Please specify gas type when ordering.

# Master Series Heavy Duty Open Burner Top Range

## Models

- M44R
- M44S
- M44T



Model M44R  
Range with  
Four Open Burners

## Standard Features

- Stainless steel front and sides
- 6" (152mm) chrome steel adj. legs
- 7-1/2" (191mm) stainless steel front rail
- Four 35,000 BTU, (10.25 kW), (natural gas) or 32,000 BTU (9.37kW) (propane), two piece Starfire burners with removable heads
- Removable ring grate bowl over each burner
- Cast iron top grates
- One-piece Stainless Steel drip tray
- Piezo spark ignition for oven
- Fully porcelainized oven interior
- 40,000 BTU, (11.72 kW) natural gas or 35,000 BTU (10.25kW) propane, cast iron oven burner
- Storage base interior of aluminized steel

## Options & Accessories


- Stainless steel main back
- Stainless steel common front rail up to 102" (2591mm) wide (two or more units in a battery)
- Stainless steel oven interior
- Convection oven base, add C to Model No., e.g. M44RC
- Additional oven rack
- Rear gas connection, 3/4" or 1" NPT
- Gas regulator 3/4" or 1-1/4"
- Gas shut off valve; 3/4", 1" or 1-1/4" NPT
- Gas flex hose & quick disconnect (3/4", 1" or 1-1/4" NPT x 5') w/ restraining device, please specify
- End caps and cover, NC specify
- Set of (4) Polyurethane non-marking swivel casters w/front brakes
- 6" (152mm) stainless steel adj. legs
- Dais base (not for use with "RC" oven)
- Storage base shelf of aluminized or stainless steel
- Stainless steel tubular high shelf, single or double deck
- Stainless steel backguard: 10" (354mm), 17" (432mm) or 33" (838mm)
- 230 volt, 50 cycle components, RC motor (export)
- Celsius dial for oven thermostat (NC)

## Specifications

Heavy-duty gas range with oven, Model M44R. Four 35,000 BTU, (10.25 kW), two-piece Starfire burners. Heavy-duty cast iron top grates and ring grates. 34" (864mm) wide x 38" (965mm) deep, including 7-1/2" (191mm) deep stainless steel front rail. Porcelain enamel oven interior with 40,000 BTU (11.72 kW) cast iron oven burner. Stainless steel front and sides. 180,000 BTU total. (52.74 kW). Natural or propane gas. Also available with storage base w/doors, suffix S, and modular top, suffix T.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



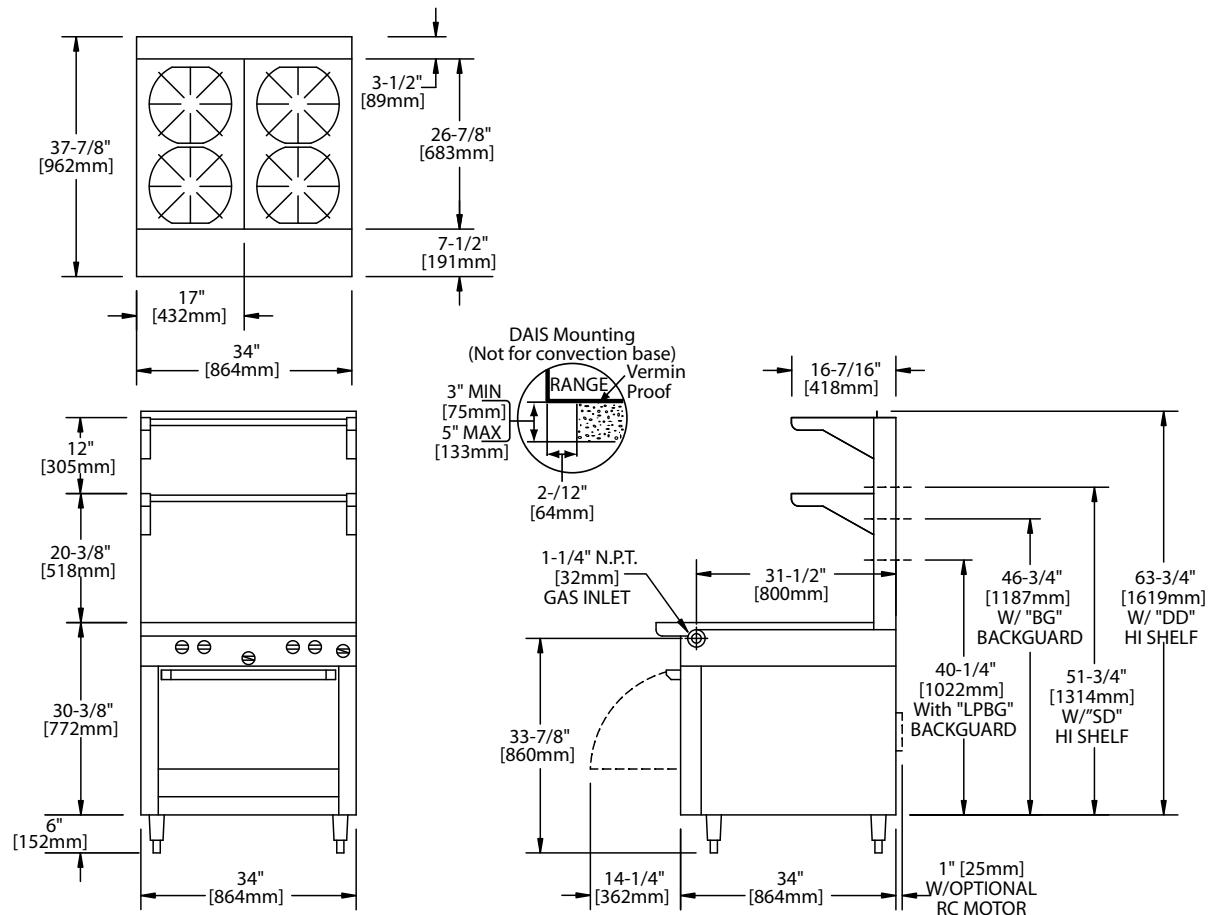

| Product | Width:<br>In(mm) | Depth:<br>In(mm) | Height: In(mm)<br>(w/ NSF Legs) | Height: In(mm)<br>(w/o NSF Legs) | Oven/Storage Base Interior: in(mm) |             |             |
|---------|------------------|------------------|---------------------------------|----------------------------------|------------------------------------|-------------|-------------|
|         |                  |                  |                                 |                                  | Width                              | Depth       | Height      |
| M44R    | 34(864)          | 38(965)          | 36-3/8(924)                     | 30-3/8(772)                      | 26-1/4(667)                        | 29(737)**   | 13-1/2(343) |
| M44S    | 34(864)          | 38(965)          | 36-3/8(924)                     | 30-3/8(772)                      | 26(665)                            | 30-1/2(773) | 20-1/2(519) |
| M44T    | 34(864)          | 38(965)          | 36-3/8(924) w/stand             | 9-1/2 (241) w/o stand*           | N/A                                | N/A         | N/A         |

\*Modular top has 1-1/2" seating flanges. \*\*RC oven is 25" (635mm) deep.

| INPUT-BTU/hr | M44R & M44RC      |                   | M44S & M44T       |                   |
|--------------|-------------------|-------------------|-------------------|-------------------|
|              | Natural           | Propane           | Natural           | Propane           |
| Top Section  | 140,000 (41.02kW) | 128,000 (37.48kW) | 140,000 (41.02kW) | 128,000 (37.48kW) |
| Oven         | 40,000 (11.72kW)  | 35,000 (10.25kW)  | N/A               | N/A               |
| TOTAL        | 180,000 (52.74kW) | 163,000 (47.73kW) | 140,000 (41.02kW) | 128,000 (37.48kW) |

RC=Range w/Convection Oven R=Range w/Oven S=Range w/Storage Base T=Modular Top

| INSTALLATION NOTES                       |                           |                          | Shipping Wt: (Lb/Kg) <sup>2</sup>             |
|------------------------------------------|---------------------------|--------------------------|-----------------------------------------------|
| Combustible Wall Clearances <sup>1</sup> | Entry Clearances          | Operating Pressure       | M44R 440/200<br>M44S 340/1551<br>M44T 250/114 |
| Sides: 14" (356mm)                       | Crated: 39-1/4" (997mm)   | Natural: 6" WC (15mbar)  |                                               |
| Back: 6" (152mm)                         | Uncrated: 34-1/4" (870mm) | Propane: 10" WC (25mbar) |                                               |

<sup>1</sup>NOTE: Installation clearance reductions are applicable only where local codes permit.

<sup>2</sup>Shipping Cubic Feet 50 for R & S Models, 20 for T models

Data applies only to North America

Gas input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Electrical characteristics each RC oven: 1/3 HP motor, 120 VAC, single phase, 3.4 amps, 6 ft. (1.8m) power cord with NEMA 5-15P plug provided.

230 VAC export is direct connect, single phase, 50 Hz. Please specify gas type when ordering.

## По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

эл.почта: [gyb@nt-rt.ru](mailto:gyb@nt-rt.ru) || сайт: <https://garland.nt-rt.ru/>